

Specifications




MODELS	GS™-2668 RT		GS™-3268 RT	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum*	9.92 m	32 ft	11.75 m	38 ft
1 Platform height maximum	7.92 m	26 ft	9.75 m	32 ft
2 Platform height - stowed	1.19 m	3 ft 10.75 in	1.31 m	4 ft 3.75 in
3 Platform length - outside	2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
4 Platform length - extended	3.75 m	12 ft 3 in	3.73 m	12 ft 3 in
Side-out platform extension deck	1.22 m	4 ft	1.22 m	4 ft
5 Platform width - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Toeboard height	15 cm	6 in	15 cm	6 in
6 Height - stowed*	2.32 m	7 ft 7.5 in	2.45 m	8 ft 5 in
7 Height - stowed rails lowered	1.70 m	5 ft 7 in	1.83 m	6 ft
8 Length - stowed	2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
9 Length - stowed platform extended with outriggers	4.10 m	13 ft 5.5 in	4.10 m	13 ft 5.5 in
10 Width	1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
11 Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
12 Ground clearance - centre	19 cm	7.5 in	19 cm	7.5 in

PRODUCTIVITY				
Maximum platform occupancy (indoor/outdoor)	4/4	4/4	4/2	4/2
Lift capacity	967 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	6.1 km/h	3.8 mph	6.1 km/h	3.8 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability-stowed***	35%	35%	30%	30%
Maximum outrigger levelling:				
front to back	6.6°	6.6°	6.6°	6.6°
side to side	10.6°	10.6°	10.6°	10.6°
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 11 in	3.68 m	12 ft 11 in
Raise/lower speed	30/35 sec	30/35 sec	40/37 sec	40/37 sec
Controls	proportional	proportional	proportional	proportional
Drive	four wheel	four wheel	four wheel	four wheel
Tires - rough terrain	30 x 60 cm	12 x 23.5 in	30 x 60 cm	12 x 23.5 in

POWER				
Power source	Kubota diesel 20 hp (15 kW) Kubota petrol/LPG 23 hp (17 kW) Perkins 400C-11 Diesel 26 hp		Kubota diesel 20 hp (15 kW) Kubota petrol/LPG 23 hp (17 kW) Perkins 400C-11 Diesel 26 hp	
Fuel tank capacity	96.8 L	15 gal	96.8 L	15 gal
Hydraulic system capacity	62.5 L	16.5 gal	62.5 L	16.5 gal

WEIGHT****				
Weight modifiers for options:	3,072 kg	6,772 lbs	3,762 kg	8,293 lbs
Outriggers	add 483 kg	1,064 lbs	483 kg	1,064 lbs
Generator	add 48 kg	105 lbs	48 kg	105 lbs

STANDARDS COMPLIANCE	CE EN280, PD - 10-611-03
----------------------	--------------------------

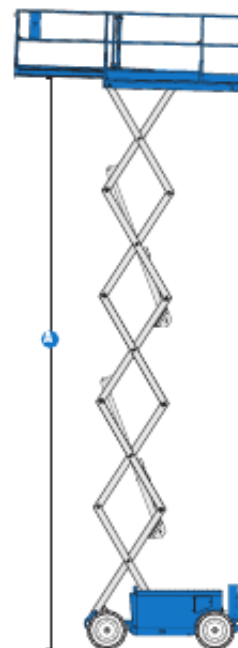

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tires, deduct 5.8 cm (2 1/4 in) for turf and non-marking tires.
 *** Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See Operator's Manual for details regarding slope ratings.
 **** Weight varies depending on options and country standards.